

EXPLANATIONS
ALL MEASURES ARE IN MILLIMETERS.

NOTES
THE SLIDING WINDOW SHALL BE TYPE NJORD THERMO, SVALSON AB SWEDEN (+46 911 66725).

CONSTRUCTION
MOTOR, TRANSMISSION AND AUTOMATIC LOCKING SHALL BE PLACED WITHIN THE FRAME.

LOCKING
THE SLIDING WINDOW SHALL BE LOCKED AUTOMATICALLY IN CLOSED POSITION. (LOCKING IN 50 mm INTERVAL IS OPTIONAL.)

FINISH
THE ALUMINIUMPROFILES SHALL BE SATIN ANODISED. (OR ANY OTHER FINISH, FOR INSTANCE COLOUR COATED OR ANODISED IN OTHER COLOURS.)

GLASS
DOUBLE GLAZING 4-15-4. (OR FOR INSTANCE 6-12-6 mm.)



OPENINGSPEED
THE OPENINGSPEED OF THE SLIDING WINDOW IS APPROX. 200 mm/SECOND.

REV	REVISION REFERS TO	DATE	SIGN
-----	--------------------	------	------



SLIDING WINDOW
TYPE NJORD THERMO

DRAWN/DESIGN	SCALE	VIEW FROM OUTSIDE	VIEW FROM INSIDE
---	1:10		
DATE	DRAWING NUMBER	REV	
DD.MM.YY	NJORD THERMO		

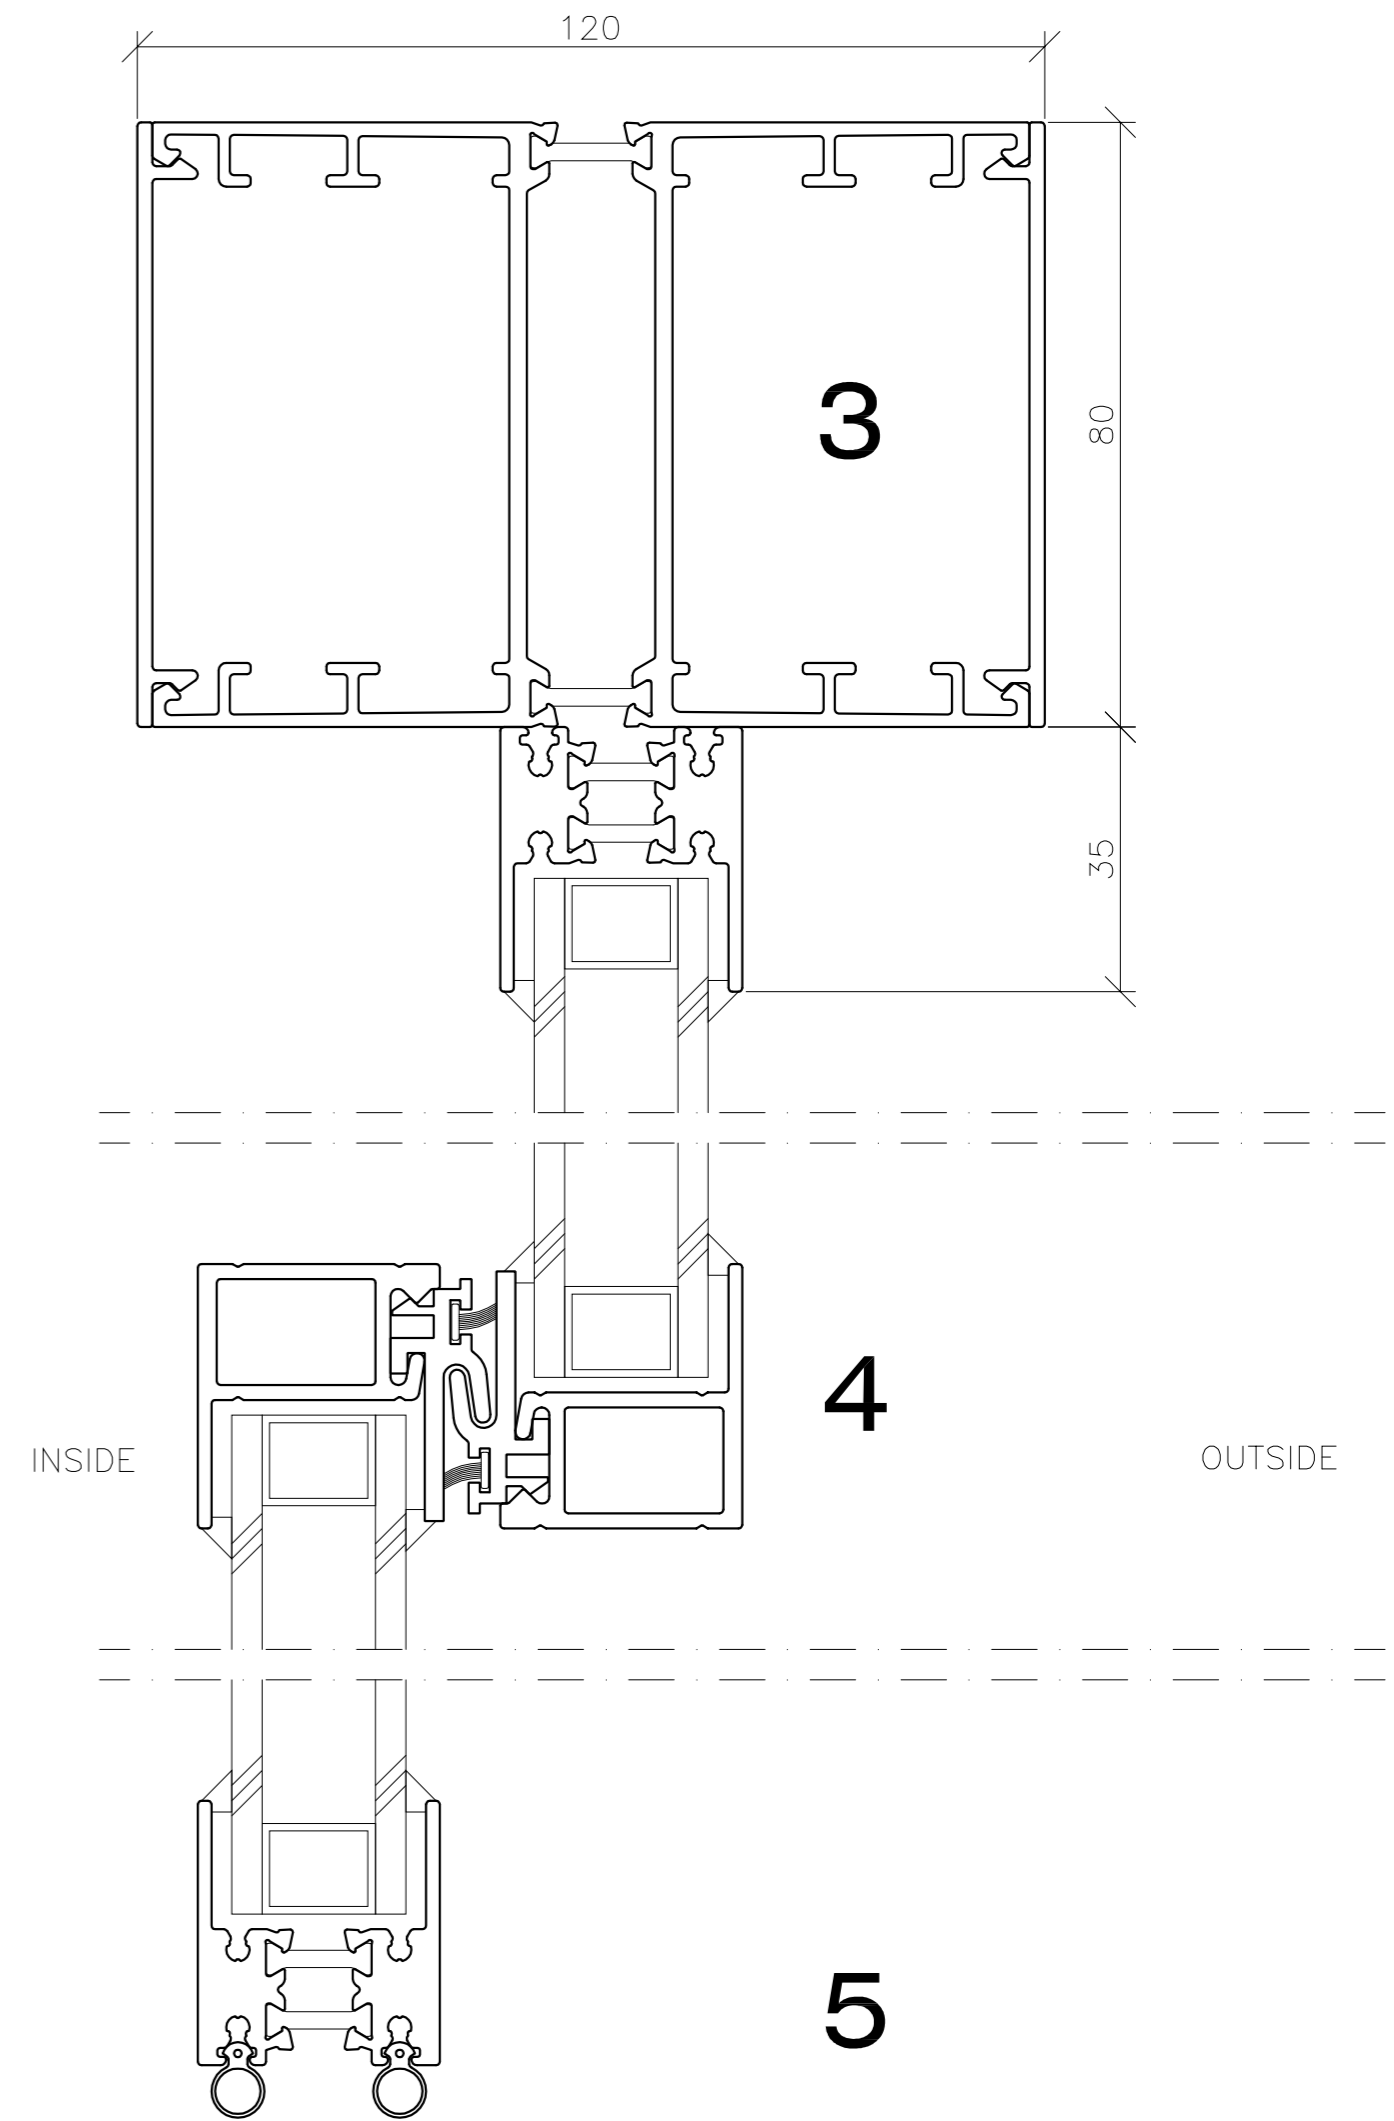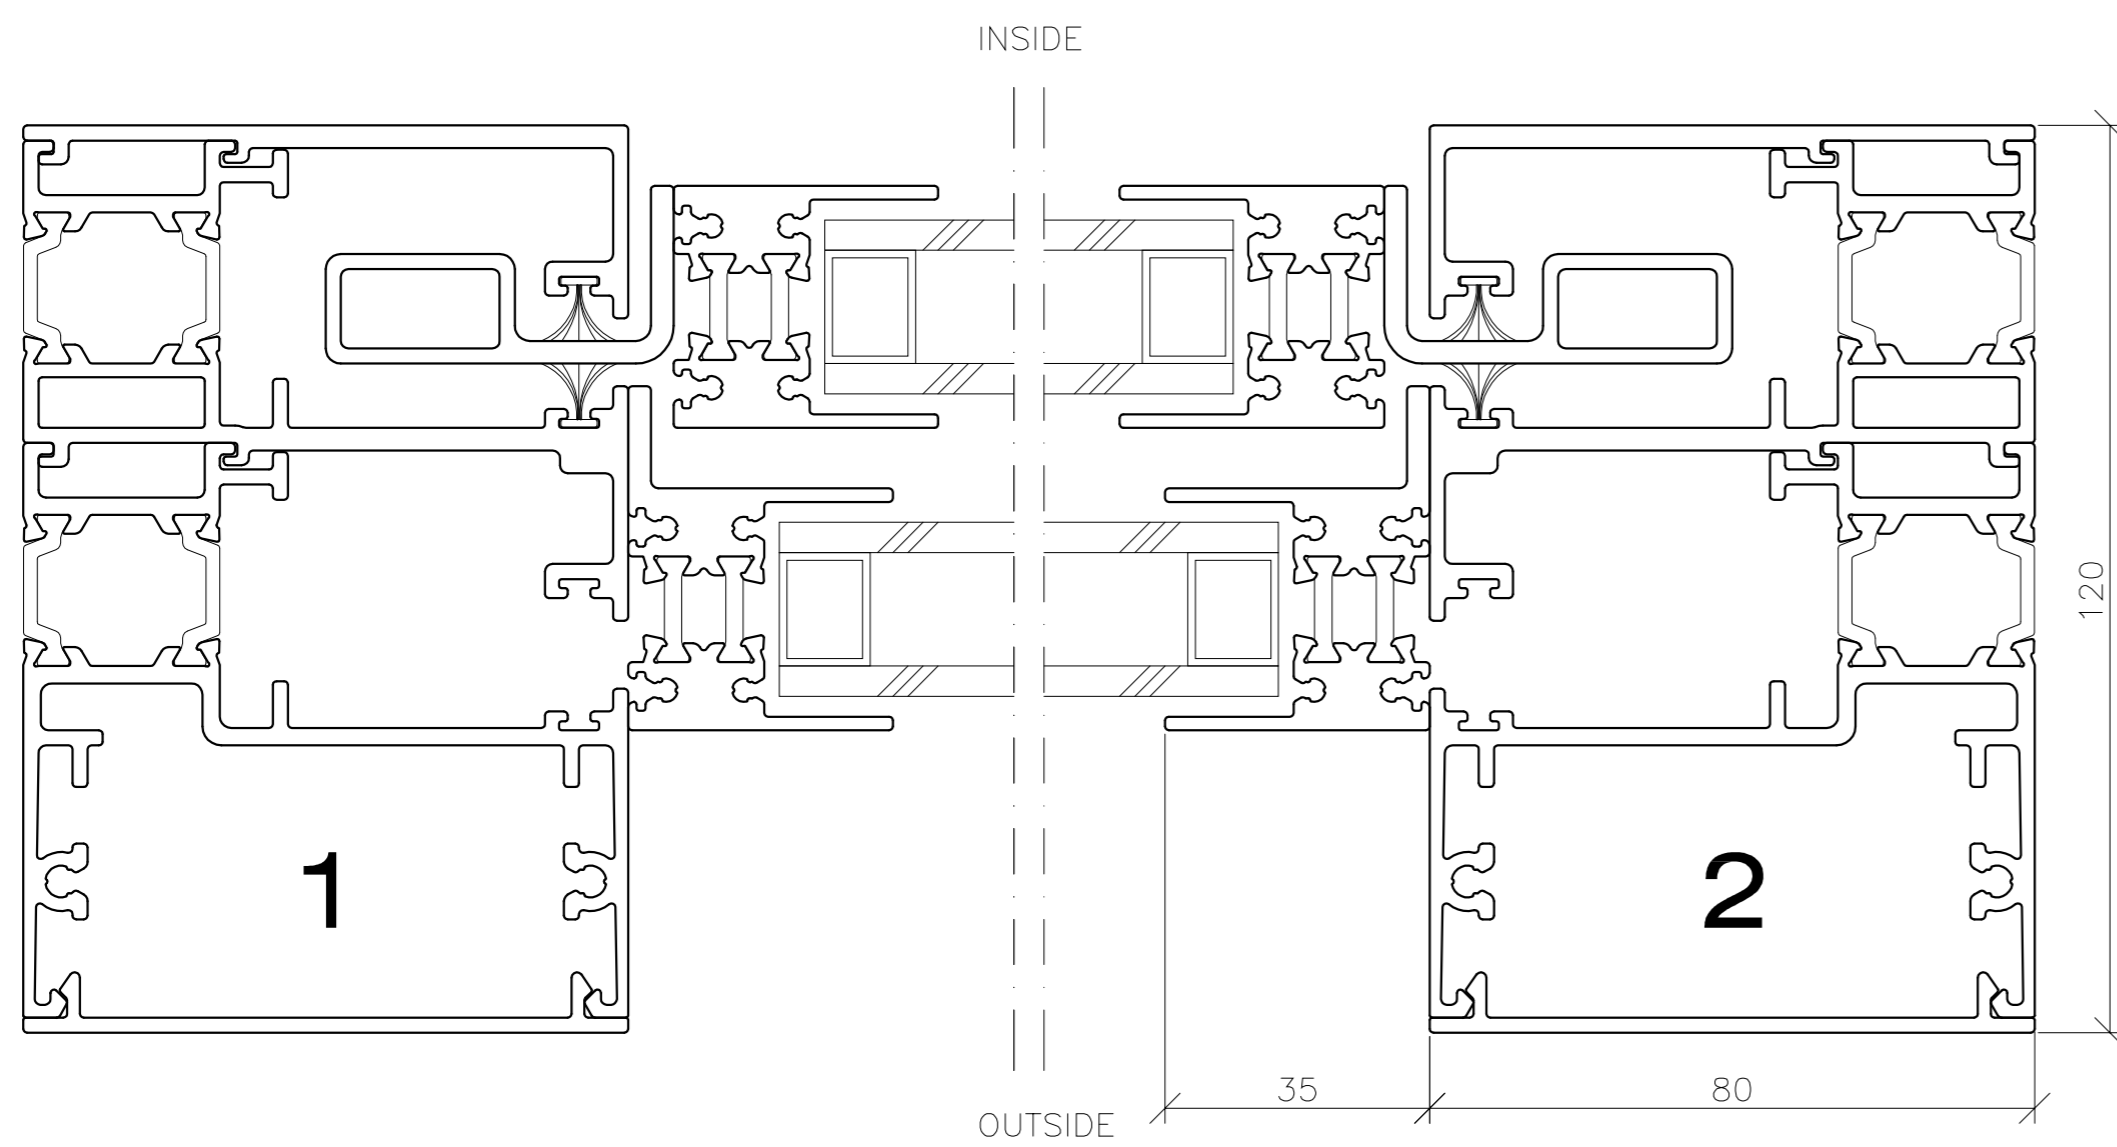

REV	REVISION REFERS TO	DATE	SIGN


 SVALSON AB
 Phone +46 911-66725
 Telefax +46 911-66680
<http://www.svalson.com>

SLIDING WINDOW
TYPE NJORD THERMO

DRAWN/DESIGN	SCALE	VIEW FROM OUTSIDE
---	1:1	VIEW FROM INSIDE
DATE	DRAWING NUMBER	REV
DD.MM.YY	NJORD THERMO	

Box 584
 S-943 28 Ojebyn
 SWEDEN